



型号: 6201-2RSL

基本尺寸mm

d:	12
D:	32
B:	10

基本额定负荷kN

动态 C:	7.28
静态 Co:	3.1
疲劳负荷极限 Pu:	0.132

额定转速r/min

参考转速:	50000
极限转速 ¹⁾ :	26000
质量kg:	0.037

型号

两侧带密封件:	*6201-2RSL
一侧带密封件:	*6201-RSL

尺寸mm


d:	12
d1 ~ :	-
d2 ~ :	16.6
D2 ~ :	27.4
r _{1,2} 最小:	0.6

挡肩及倒角尺寸mm

d _a 最小:	16.2
d _a 最大:	16.5
Da 最大:	27.8
r _a 最大:	0.6

计算系数

k _r :	0.025
f _o :	12

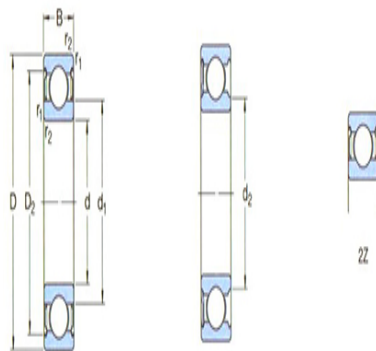



2RSH

