



型号: 62201-2RS1

基本尺寸mm

d:	12
D:	32
B:	14

基本额定负荷kN

动态 C:	6.89
静态 Co:	3.1
疲劳负荷极限 Pu:	0.132

额定转速r/min

参考转速:	-
极限转速 ¹⁾ :	15000
质量kg:	0.045

型号

两侧带密封件:	62201-2RS1
一侧带密封件:	-

尺寸mm



d:	12
d1 ~ :	18.5
d2 ~ :	-
D2 ~ :	27.4
r _{1,2} 最小:	0.6

挡肩及倒角尺寸mm

d _a 最小:	16.2
d _a 最大:	-
Da 最大:	27.8
r _a 最大:	0.6

计算系数

k _r :	0.025
fo:	12

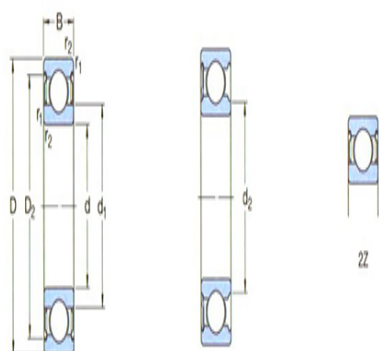



2RSH

