

型号: 6301-2RSL

基本尺寸mm

d:	12
D:	37
B:	12

基本额定负荷kN

动态 C:	10.1
静态 Co:	4.15
疲劳负荷极限 Pu:	0.176

额定转速r/min

参考转速:	45000
极限转速 ¹⁾ :	22000
质量kg:	0.06

型号

两侧带密封件:	*6301-2RSL
一侧带密封件:	*6301-RSL

尺寸mm



d:	12
d1 ~ :	-
d2 ~ :	17.7
D2 ~ :	31.5
r _{1,2} 最小:	1

挡肩及倒角尺寸mm

d _a 最小:	17.6
d _a 最大:	17.6
Da 最大:	31.4
r _a 最大:	1

计算系数

k _r :	0.03
fo:	11

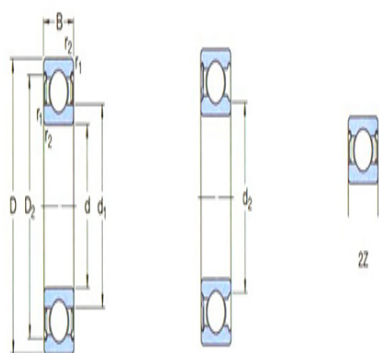



2RSH

