



### 型号: 6000-RSL

#### 基本尺寸mm

d:	10
D:	26
B:	8

#### 基本额定负荷kN

动态 C:	4.75
静态 Co:	1.96
疲劳负荷极限 Pu:	0.083

#### 额定转速r/min

参考转速:	67000
极限转速 <sup>1)</sup> :	34000
质量kg:	0.019

#### 型号

两侧带密封件:	*6000-2RSL
一侧带密封件:	*6000-RSL

#### 尺寸mm



d:	10
d1 ~ :	-
d2 ~ :	13
D2 ~ :	22.6
r <sub>1,2</sub> 最小:	0.3

#### 挡肩及倒角尺寸mm

d <sub>a</sub> 最小:	12
d <sub>a</sub> 最大:	12.5
Da 最大:	24
r <sub>a</sub> 最大:	0.3

#### 计算系数

k <sub>r</sub> :	0.025
fo:	12

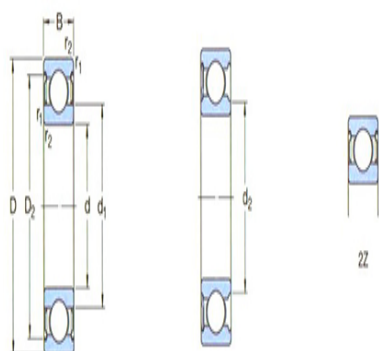



2RSH

