



**型号：6001-RSL**

**基本尺寸mm**

d:	12
D:	28
B:	8

**基本额定负荷kN**

动态 C:	5.4
静态 Co:	2.36
疲劳负荷极限 Pu:	0.1

**额定转速r/min**

参考转速:	60000
极限转速 <sup>1)</sup> :	30000
质量kg:	0.022

**型号**

两侧带密封件:	*6001-2RSL
一侧带密封件:	*6001-RSL

**尺寸mm**



d:	12
d1 ~ :	-
d2 ~ :	15.2
D2 ~ :	24.8
r <sub>1,2</sub> 最小:	0.3

**挡肩及倒角尺寸mm**

d <sub>a</sub> 最小:	14
d <sub>a</sub> 最大:	15
Da 最大:	26
r <sub>a</sub> 最大:	0.3

**计算系数**

k <sub>r</sub> :	0.025
fo:	13

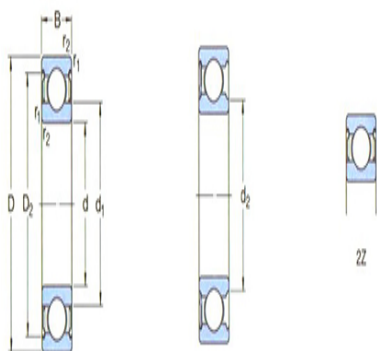



2RSH

