

**型号：6201-RSL**

**基本尺寸mm**

d:	12
D:	32
B:	10

**基本额定负荷kN**

动态 C:	7.28
静态 Co:	3.1
疲劳负荷极限 Pu:	0.132

**额定转速r/min**

参考转速:	50000
极限转速 <sup>1)</sup> :	26000
质量kg:	0.037

**型号**

两侧带密封件:	*6201-2RSL
一侧带密封件:	*6201-RSL

**尺寸mm**



d:	12
d1 ~ :	-
d2 ~ :	16.6
D2 ~ :	27.4
r <sub>1,2</sub> 最小:	0.6

**挡肩及倒角尺寸mm**

d <sub>a</sub> 最小:	16.2
d <sub>a</sub> 最大:	16.5
Da 最大:	27.8
r <sub>a</sub> 最大:	0.6

**计算系数**

k <sub>r</sub> :	0.025
f <sub>o</sub> :	12

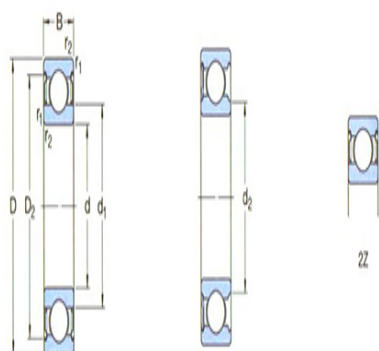



2RSH

