



型号: 6201-RSH

基本尺寸mm

| | |
|----|----|
| d: | 12 |
| D: | 32 |
| B: | 10 |

基本额定负荷kN

| | |
|------------|-------|
| 动态 C: | 7.28 |
| 静态 Co: | 3.1 |
| 疲劳负荷极限 Pu: | 0.132 |

额定转速r/min

| | |
|----------------------|-------|
| 参考转速: | - |
| 极限转速 ¹⁾ : | 15000 |
| 质量kg: | 0.037 |

型号

| | |
|---------|------------|
| 两侧带密封件: | *6201-2RSH |
| 一侧带密封件: | *6201-RSH |

尺寸mm



| | |
|----------------------|------|
| d: | 12 |
| d1 ~ : | - |
| d2 ~ : | 16.6 |
| D2 ~ : | 27.4 |
| r _{1,2} 最小: | 0.6 |

挡肩及倒角尺寸mm

| | |
|--------------------|------|
| d _a 最小: | 16.2 |
| d _a 最大: | 16.5 |
| Da 最大: | 27.8 |
| r _a 最大: | 0.6 |

计算系数

| | |
|------------------|-------|
| k _r : | 0.025 |
| f _o : | 12 |

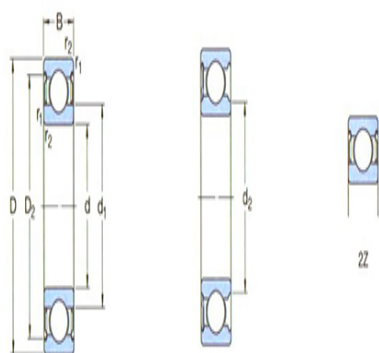



2RSH

