



### 型号: 6301-Z

#### 基本尺寸mm

d:	12
D:	37
B:	12

#### 基本额定负荷kN

动态 C:	10.1
静态 Co:	4.15
疲劳负荷极限 Pu:	0.176

#### 额定转速r/min

参考转速:	45000
极限转速 <sup>1)</sup> :	22000
质量kg:	0.06

#### 型号

两侧带密封件:	*6301-2Z
一侧带密封件:	*6301-Z

#### 尺寸mm



d:	12
d1 ~ :	19.5
d2 ~ :	-
D2 ~ :	31.5
r <sub>1,2</sub> 最小:	1

#### 挡肩及倒角尺寸mm

d <sub>a</sub> 最小:	17.6
d <sub>a</sub> 最大:	-
Da 最大:	31.4
r <sub>a</sub> 最大:	1

#### 计算系数

k <sub>r</sub> :	0.03
fo:	11

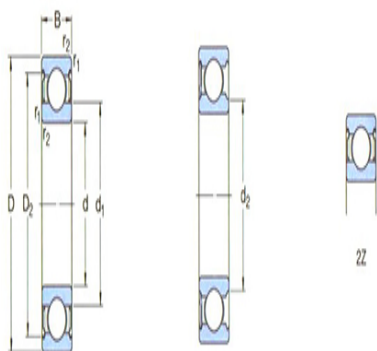



2RSH

