



型号: NNC4856CV

基本尺寸mm

d:	280
D:	350
B:	69

基本额定负荷kN

动态 C:	737
静态 Co:	1860
疲劳负荷极限 Pu:	173

额定转速r/min


参考转速:	750
极限转速:	950
质量:	16
型号:	NNC4856CV

尺寸mm

d:	280
d ₁ ~:	308
D ₁ ~:	326
E:	332.4
b ₁ :	8
k:	4
r _{1,2} 最小:	2
s ¹⁾ :	-


挡肩及倒角尺寸mm

d _a 最小:	290
d _{as} ²⁾ 建议值:	304
Da 最大:	340
r _a 最大:	2

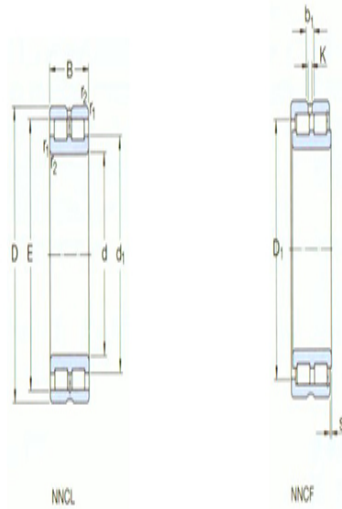

NNCL

NCF

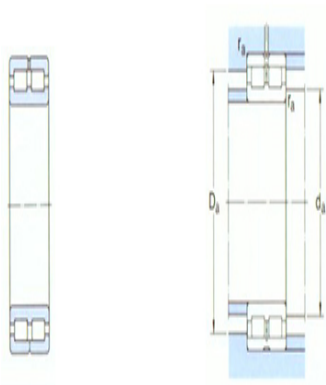

NNC