



**型号: NNCF5064CV**

**基本尺寸mm**

d:	320
D:	480
B:	218

**基本额定负荷kN**

动态 C:	3690
静态 Co:	6950
疲劳负荷极限 Pu:	620

**额定转速r/min**


参考转速:	560
极限转速:	700
质量:	135
型号:	NNCF5064CV

**尺寸mm**

d:	320
d <sub>1</sub> ~:	370
D <sub>1</sub> ~:	434
E:	449
b <sub>1</sub> :	9.4
k:	5
r <sub>1,2</sub> 最小:	4
s <sup>1)</sup> :	9


**挡肩及倒角尺寸mm**

d <sub>a</sub> 最小:	338
d <sub>as</sub> <sup>2)</sup> 建议值:	360
Da 最大:	462
r <sub>a</sub> 最大:	3

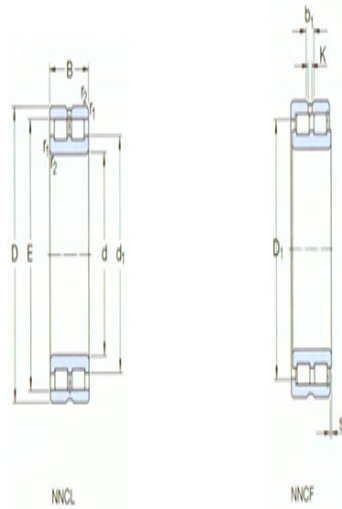

NNCL

NCF

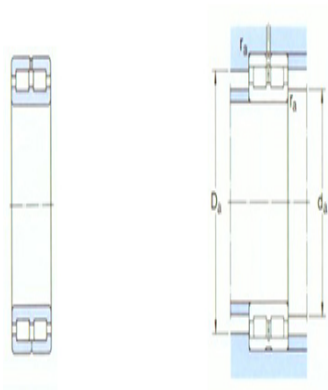

NNC