



型号: NNCL4668CV

基本尺寸mm

d:	340
D:	420
B:	80

基本额定负荷kN

动态 C:	913
静态 Co:	2400
疲劳负荷极限 Pu:	216

额定转速r/min


参考转速:	600
极限转速:	750
质量:	25.5
型号:	NNCL4668CV

尺寸mm

d:	340
d ₁ ~:	369
D1 ~:	-
E:	396.9
b ₁ :	9.4
k:	5
r _{1,2} 最小:	2.1
s ¹⁾ :	6


挡肩及倒角尺寸mm

d _a 最小:	351
d _{as} ²⁾ 建议值:	-
Da 最大:	409
r _a 最大:	2

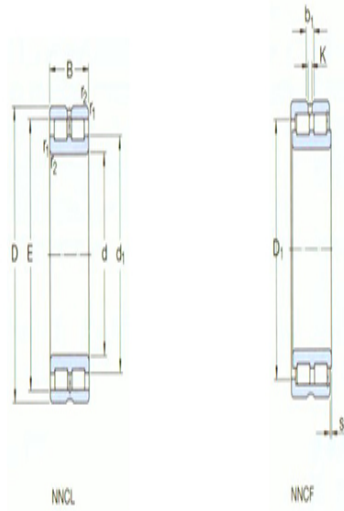

NNCL

NCF

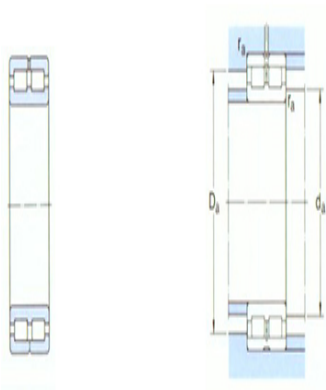

NNC