



**型号: NNCF4968CV**

**基本尺寸mm**

d:	340
D:	460
B:	118

**基本额定负荷kN**

动态 C:	1790
静态 Co:	4250
疲劳负荷极限 Pu:	390

**额定转速r/min**


参考转速:	560
极限转速:	700
质量:	59
型号:	NNCF4968CV

**尺寸mm**

d:	340
d <sub>1</sub> ~:	386
D <sub>1</sub> ~:	418
E:	430.11
b <sub>1</sub> :	9.4
k:	5
r <sub>1,2</sub> 最小:	3
s <sup>1)</sup> :	6


**挡肩及倒角尺寸mm**

d <sub>a</sub> 最小:	355
d <sub>as</sub> <sup>2)</sup> 建议值:	380
Da 最大:	445
r <sub>a</sub> 最大:	2.5

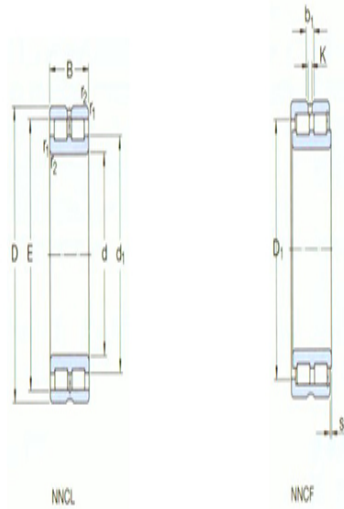

NNCL

NCF

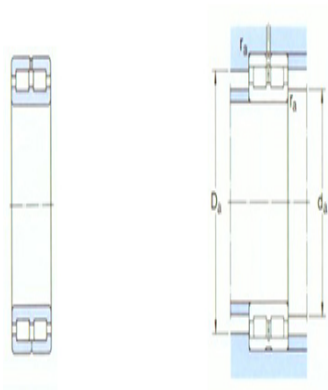

NNC