



**型号: NNCF5068CV**

**基本尺寸mm**

d:	340
D:	520
B:	243

**基本额定负荷kN**

动态 C:	4400
静态 Co:	8300
疲劳负荷极限 Pu:	710

**额定转速r/min**


参考转速:	530
极限转速:	670
质量:	185
型号:	NNCF5068CV

**尺寸mm**

d:	340
d <sub>1</sub> ~:	395
D <sub>1</sub> ~:	468
E:	485
b <sub>1</sub> :	9.4
k:	5
r <sub>1,2</sub> 最小:	5
s <sup>1)</sup> :	11


**挡肩及倒角尺寸mm**

d <sub>a</sub> 最小:	363
d <sub>as</sub> <sup>2)</sup> 建议值:	384
Da 最大:	497
r <sub>a</sub> 最大:	4

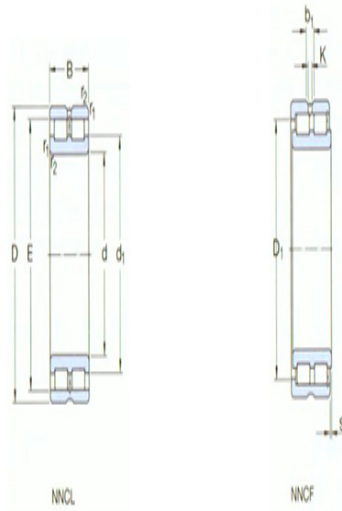

NNCL

NCF

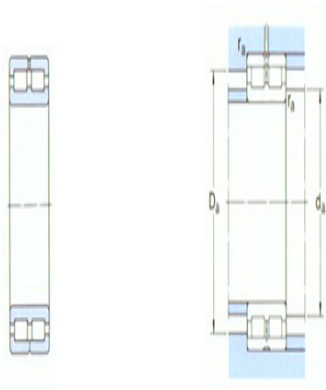

NNC