



型号: NNCL4872CV

基本尺寸mm

d:	360
D:	440
B:	80

基本额定负荷kN

动态 C:	935
静态 Co:	2550
疲劳负荷极限 Pu:	224

额定转速r/min


参考转速:	560
极限转速:	700
质量:	27
型号:	NNCL4872CV

尺寸mm

d:	360
d ₁ ~:	392
D1 ~:	-
E:	419.8
b ₁ :	9.4
k:	5
r _{1,2} 最小:	2.1
s ¹⁾ :	6


挡肩及倒角尺寸mm

d _a 最小:	371
d _{as} ²⁾ 建议值:	-
Da 最大:	429
r _a 最大:	2

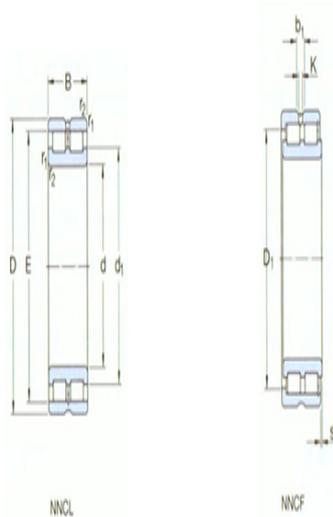

NNCL

NNCF



NNC