



**型号: BMB-6208/080S2/EB002A**

**基本尺寸**



d:	40
D:	80
B:	18

**基本额定负荷**

动态 C:	32.5
静态 Co:	19
疲劳负荷极限 Pu:	0.8
极限转速:	5600

**感测器**

脉冲数量:	80
周期精度:	±5
相移精度:	90±45
质量:	0.4
型号:	BMB-6208/080S2/EB002A

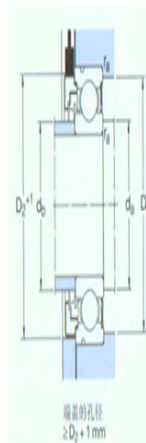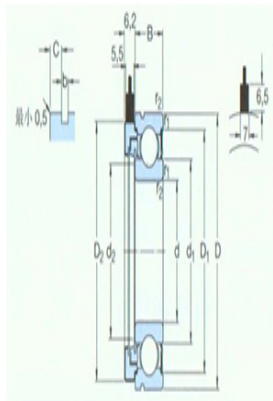

**尺寸**

d:	40
d <sub>1</sub> ≈:	52.6
d <sub>2</sub> :	48
D <sub>1</sub> ≈:	69.8
D <sub>2</sub> :	75
b:	1.9
C:	3.28

**挡肩及倒角尺寸**

r <sub>1,2</sub> 最小:	1.1
d <sub>a</sub> 最小:	46.5
d <sub>b</sub> 最小:	46.5
d <sub>b</sub> 最大:	47.5
D <sub>a</sub> 最大:	73.5

**径向游隙**

r <sub>a</sub> 最大:	1
最小:	15

