





## 型号: MGN9H

### 参数




导轨型号:	MGN9H
滑块特殊加工:	无
滑块数量类型:	单个
导轨长度L:	135
L计算公式:	$L=(n-1) \times P + 2 \times E$ n=1,2,3....
导轨特殊加工:	无
预压等级:	普通间隙(ZF)
精度等级:	普通(C)
导轨材质:	普通钢
防尘配备等级:	标准防尘配备
防尘配备:	标准(刮油片)
组件尺寸:	
H:	10
H1:	2
N:	5.5
滑块尺寸:	
W:	20
B:	15
B1:	2.5
C:	16
L1:	29.9
L:	39.9
G:	-
Gn:	φ 1.4
MxL:	M3x3
H2:	1.8
导轨尺寸:	
WR:	9
HR:	6.5
D:	6
h:	3.5
d:	3.5
P:	20
标准端距E:	7.5

### MGN-C / MGN-H

MGN7, MGN9, MGN12



MGN15

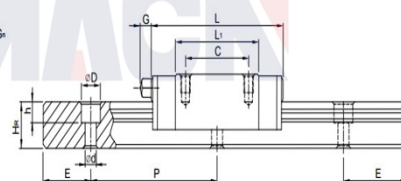

实际端距:	7.5
螺栓孔数n:	7
导轨固定螺栓:	M3x8
额定动载荷C:	2.55
额定静载荷Co :	4.02
额定静力矩MR :	19.60
额定静力矩MP :	18.62
额定静力矩MY :	18.62
滑块重量:	0.026
导轨重量:	0.38