





## 型号: MGN12H

### 参数




导轨型号:	MGN12H
滑块特殊加工:	无
滑块数量类型:	单个
导轨长度L:	150
L计算公式:	$L=(n-1) \times P+2 \times E$ n=1,2,3....
导轨特殊加工:	无
预压等级:	普通间隙(ZF)
精度等级:	普通(C)
导轨材质:	普通钢
防尘配备等级:	标准防尘配备
防尘配备:	标准(刮油片)
RC强化型螺栓盖:	无
组件尺寸:	
H:	13
H1:	3
N:	7.5
滑块尺寸:	
W:	27
B:	20
B1:	3.5
C:	20
L1:	32.4
L:	45.4
G:	-
Gn:	φ 2
MxL:	M3x3.5
H2:	2.5
导轨尺寸:	
WR:	12
HR:	8
D:	6
h:	4.5
d:	3.5
P:	25

### MGN-C / MGN-H

#### MGN7, MGN9, MGN12



#### MGN15

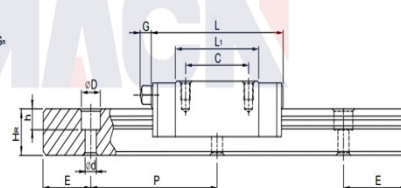

标准端距E:	10
实际端距:	12.5
螺栓孔数n:	6
导轨固定螺栓:	M3x8
额定动载荷C:	3.72
额定静载荷Co:	5.88
额定静力矩MR:	38.22
额定静力矩MP:	36.26
额定静力矩MY:	36.26
滑块重量:	0.054
导轨重量:	0.65