





型号: MGN15H

参数




导轨型号:	MGN15H
滑块特殊加工:	无
滑块数量类型:	单个
导轨长度L:	230
L计算公式:	$L=(n-1) \times P+2 \times E$ n=1,2,3....
导轨特殊加工:	无
预压等级:	普通间隙(ZF)
精度等级:	普通(C)
导轨材质:	普通钢
防尘配备等级:	标准防尘配备
防尘配备:	标准(刮油片)
RC强化型螺栓盖:	无
组件尺寸:	
H:	16
H1:	4
N:	8.5
滑块尺寸:	
W:	32
B:	25
B1:	3.5
C:	25
L1:	43.4
L:	58.8
G:	4.5
Gn:	M3
MxL:	M3x4
H2:	3
导轨尺寸:	
WR:	15
HR:	10
D:	6
h:	4.5
d:	3.5
P:	40

MGN-C / MGN-H

MGN7, MGN9, MGN12



MGN15

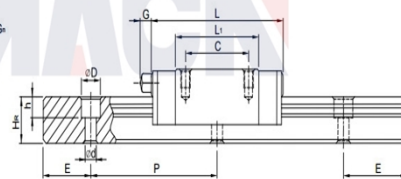

标准端距E:	15
实际端距:	15
螺栓孔数n:	6
导轨固定螺栓:	M3x10
额定动载荷C:	6.37
额定静载荷Co:	9.11
额定静力矩MR:	73.50
额定静力矩MP:	57.82
额定静力矩MY:	57.82
滑块重量:	0.092
导轨重量:	1.06