





**型号: PMN5H**

**参数**



导轨型号:	PMN5H
滑块特殊加工:	无
滑块数量类型:	单个
导轨长度L:	100
L计算公式:	$L=(n-1) \times P + 2 \times E$ n=1,2,3....
导轨特殊加工:	无
预压等级:	普通间隙(ZF)
精度等级:	普通(C)
导轨材质:	普通钢
防尘配备等级:	标准防尘配备
防尘配备:	标准(刮油片)
组件尺寸:	
H:	6
H1:	1.5
N:	3.5
滑块尺寸:	
W:	12
B:	8
B1:	2
C:	-
L1:	12.6
L:	19
Gn:	0.8
MxL:	M2x1.5
H2:	1
导轨尺寸:	
WR:	5
HR:	3.6
D:	3.6
h:	0.8
d:	2.4
P:	15
标准端距E:	5
实际端距:	5

**PMN-C/PMN-H**




PMN5C · PMN5H



PMN5HL

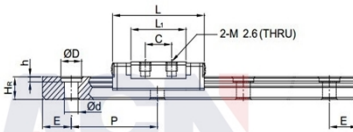

PMN9, PMN12



螺栓孔数n:	7
导轨固定螺栓:	M2x6
额定动载荷C:	0.67
额定静载荷Co :	1.08
额定静力矩MR :	2.60
额定静力矩MP :	2.30
额定静力矩MY :	2.30
滑块重量:	0.010
导轨重量:	0.15