







PMN-C/PMN-H




PMN5C · PMN5H



PMN5HL

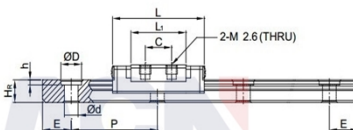

PMN9, PMN12



型号: PMN5HL

参数

| | |
|---------|--|
| 导轨型号: | PMN5HL |
| 滑块特殊加工: | 无 |
| 滑块数量类型: | 单个 |
| 导轨长度L: | 100 |
| L计算公式: | $L=(n-1) \times P+2 \times E$ n=1,2,3.... |
| 导轨特殊加工: | 无 |
| 预压等级: | 普通间隙(ZF) |
| 精度等级: | 普通(C) |
| 导轨材质: | 普通钢 |
| 防尘配备等级: | 标准防尘配备 |
| 防尘配备: | 标准(刮油片) |
| 组件尺寸: | |
| H: | 6 |
| H1: | 1.5 |
| N: | 3.5 |
| 滑块尺寸: | |
| W: | 12 |
| B: | - |
| B1: | 6 |
| C: | 7 |
| L1: | 12.6 |
| L: | 19 |
| Gn: | 0.8 |
| MxL: | M2.6-THRU |
| H2: | 1 |
| 导轨尺寸: | |
| WR: | 5 |
| HR: | 3.6 |
| D: | 3.6 |
| h: | 0.8 |
| d: | 2.4 |
| P: | 15 |
| 标准端距E: | 5 |
| 实际端距: | 5 |

| | |
|--------------|-------|
| 螺栓孔数n: | 7 |
| 导轨固定螺栓: | M2x6 |
| 额定动载荷C: | 0.67 |
| 额定静载荷Co : | 1.08 |
| 额定静力矩MR : | 2.60 |
| 额定静力矩MP : | 2.30 |
| 额定静力矩MY : | 2.30 |
| 滑块重量: | 0.010 |
| 导轨重量: | 0.15 |