

Model: 626-RSH

Basic size of
mm

| | |
|----|----|
| d: | 6 |
| D: | 19 |
| B: | 6 |

The basic rated load is
kN

| | |
|------------------------|------|
| trends C: | 2.34 |
| static state Co: | 0.95 |
| Fatigue load limit Pu: | 0.04 |

Rated rotation speed is
r/min

| | |
|-----------------------------|--------|
| Refer to the speed: | - |
| Limit speed ¹⁾ : | 24000 |
| Mass kg: | 0.0084 |

model

| | |
|------------------------|-----------|
| Both sides are sealed: | *626-2RSH |
| One side is sealed: | *626-RSH |



Dimensions are
mm

| | |
|---------------------------|------|
| d: | 6 |
| d1 ~ : | - |
| d2 ~ : | 9.5 |
| D2 ~ : | 16.5 |
| r _{1,2} the min: | 0.3 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|------|
| d _a the min: | 8.4 |
| d _a the max: | 9.4 |
| Da the max: | 16.6 |
| r _a the max: | 0.3 |

Calculation coefficient

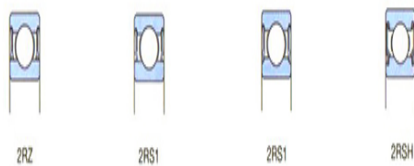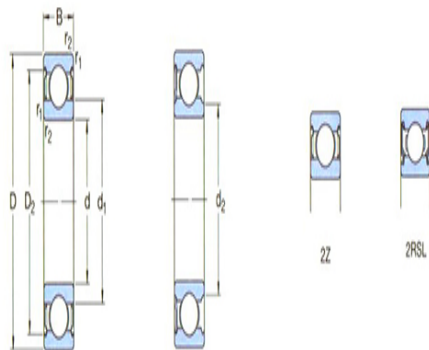

k_f : 0.025

f_o : 13

