

**Model: 6201-2ZNR**

Basic size of

mm

d:	12
D:	32
B:	10

The basic rated load is

kN

trends C:	7.28
static state Co:	3.1
Fatigue load limit Pu:	0.132

Rated rotation speed is

r/min

Refer to the speed:	50000
Limit speed <sup>1)</sup> :	32000
Mass kg:	0.037



model

Bearing belt stop slot:	*6201-ZNR
Stop slot and stop ring:	*6201-2ZNR
snap ring:	SP32

Dimensions are

mm

d:	12
d1 ~ :	18.5
D1 ~ :	27.4
D3:	30.15
D4:	36.7
b:	1.35
f:	1.12
C:	2.06
r <sub>1,2</sub> the min:	0.6
r <sub>0</sub> the max:	0.4

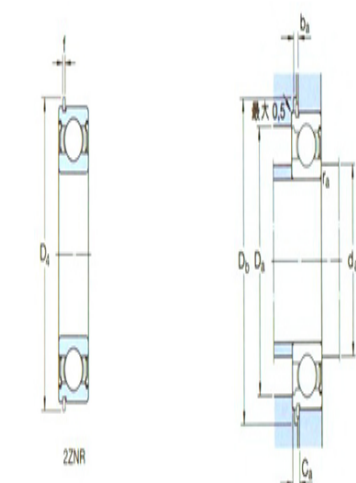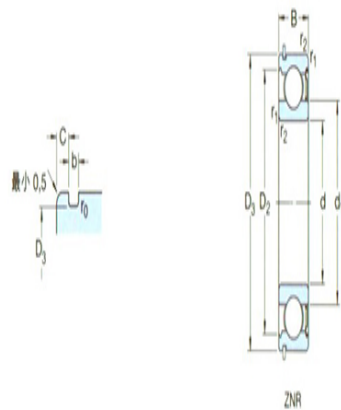

Shoulder gear and chamfer size

mm

$d_a$  the min: 16.2

$D_a$  the max: 27.8

$D_b$  the min: 38

$b_a$  the min: 1.5

$C_a$  the max: 3.18

$r_a$  the max: 0.6

Calculation coefficient

$k_r$ : 0.025

$f_o$ : 12