



Model: NU1012ML

Basic size of
mm

d:	60
D:	95
B:	18

The basic rated load is
kN

trends C:	37.4
static state Co:	44
Fatigue load limit Pu:	5.3

Rated rotation speed is
r/min

Refer to the speed:	8000
limit speed:	11000
Specification standard holder:	0.48

model



Standard holder:	NU1012ML
Other holder 1):	-

Dimensions are
mm


d:	60
d ₁ ~ :	-
D1 ~ :	81.6
F,E:	69.5
r _{1,2} the min:	1.1
r _{3,4} the min:	1
s ¹⁾ :	2.9

Shoulder gear and chamfer size
mm

d _a the min:	64.6
d _a the max:	68
d _b ,D _a the min:	72
D _a the max:	89

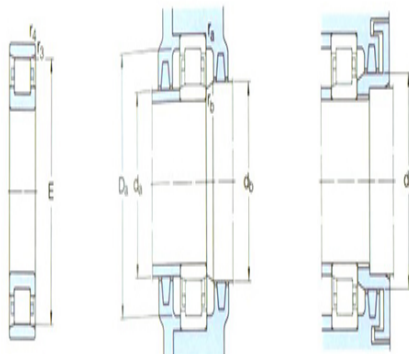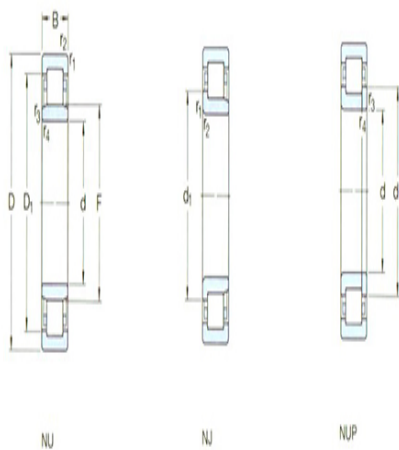

N

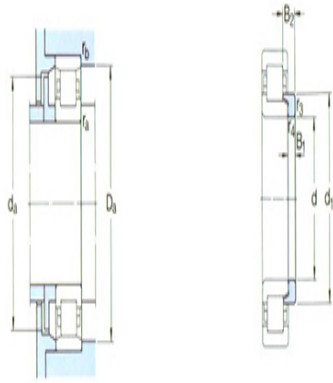

图例

r_a the max: 1

r_b the max: 1

Calculation coefficient

kr: 0.1

Corner circle

model: -

quality: -

Size B1: -

Size B2: -