



**Model: N324ECP**

Basic size of  
 mm

d:	120
D:	260
B:	55

The basic rated load is  
 kN

trends C:	610
static state Co:	620
Fatigue load limit Pu:	69.5

Rated rotation speed is  
 r/min

Refer to the speed:	2800
limit speed:	3200
Specification standard holder:	13.2

model



Standard holder:	*N324EC P
Other holder 1):	M

Dimensions are  
 mm

d:	120
d <sub>1</sub> ~ :	168
D1 ~ :	-
F,E:	230
r <sub>1,2</sub> the min:	3
r <sub>3,4</sub> the min:	3
s <sup>1)</sup> :	3.7

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	134
d <sub>a</sub> the max:	226
d <sub>b</sub> ,Da the min:	234
Da the max:	246

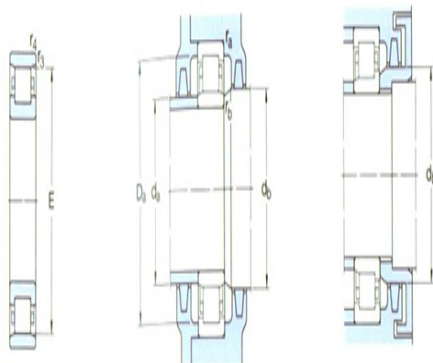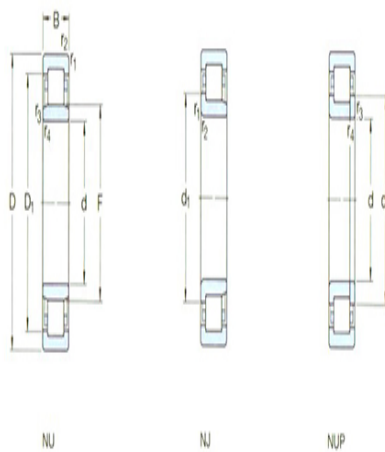

N

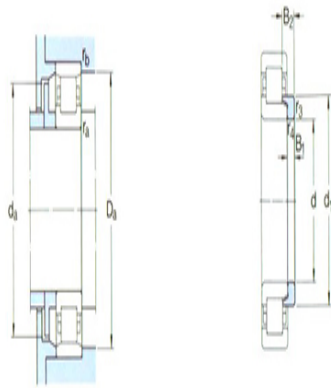


Figure 1

$r_a$  the max: 2.5

$r_b$  the max: 2.5

Calculation coefficient

kr: 0.15

Corner circle

model: -

quality: -

Size B1: -

Size B2: -