



Model: 23260CC/W33

Basic size of
mm

| | |
|----|-----|
| d: | 300 |
| D: | 540 |
| B: | 192 |

The basic rated load is
kN

| | |
|------------------------|------|
| trends C: | 3900 |
| static state Co: | 5850 |
| Fatigue load limit Pu: | 425 |

Rated rotation speed is
r/min

| | |
|---------------------|------|
| Refer to the speed: | 750 |
| limit speed: | 1000 |
| quality: | 190 |

model

| | |
|---------------|---------------|
| Column hole: | *23260CC/W33 |
| conical bore: | *23260CCK/W33 |

Dimensions are
mm


| | |
|---------------------------|------|
| d: | 300 |
| d ₂ ~ : | 356 |
| D1 ~ : | 461 |
| b: | 22.3 |
| k: | 12 |
| r _{1,2} the min: | 5 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|-----|
| d _a the min: | 320 |
| Da the max: | 520 |
| r _a the max: | 4 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.35 |
| Y1: | 1.9 |

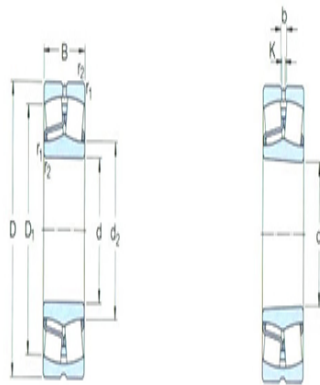

| | |
|-----|-----|
| Y2: | 2.9 |
| Y0: | 1.8 |