


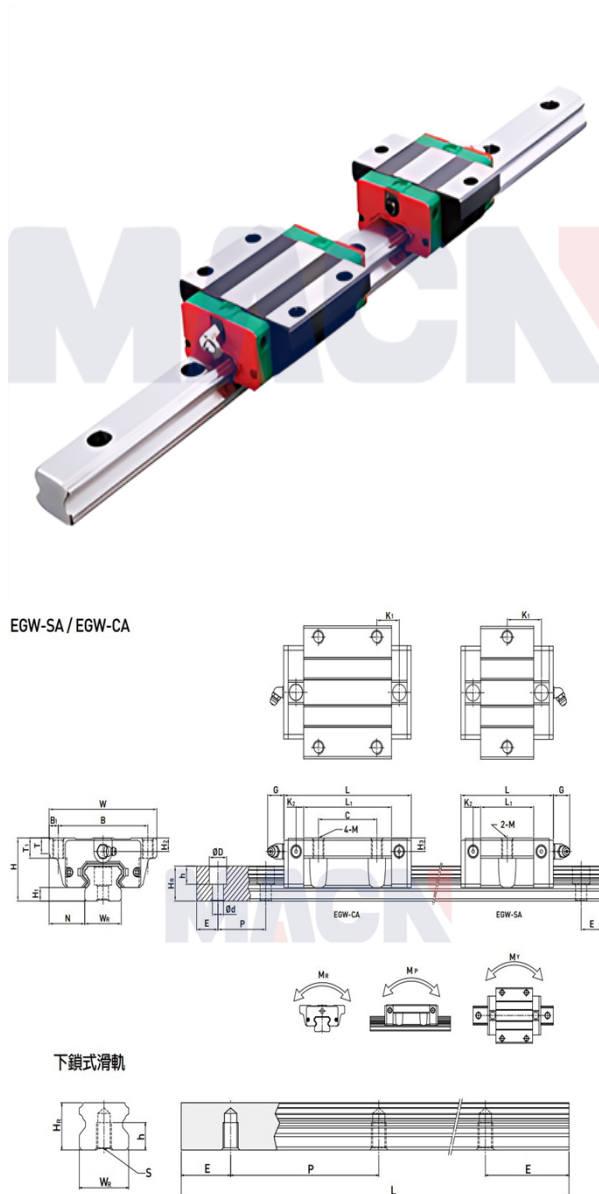

Model: EGW30CA

Param

Guide rail model:	EGW30CA
Slider special processing:	无
Number type of slider:	单个
Guide rail fixation mode:	上锁式
Guide rail length L:	440
L computational formula:	$L=(n-1) \times P+2 \times E$ $n=1,2,3, \dots$
Special processing of guide rail:	无
Pre-pressure grade:	无预压(ZO)
accuracy class:	普通(C)
dustproof equipped with grade:	标准防尘配备
Dust equipped with:	标准(刮油片+防尘片)
Special selection:	无
RC reinforced bolt cover:	无
Component size:	
H:	42
H1:	10
N:	31
Slider size:	
W:	90
B:	72
B1:	9
C:	40
L:	98.1
L1:	70.1

K1 :	21.05
K2 :	6
G :	12
M :	M10
T :	7
T1 :	10
H2 :	8
H3 :	9
Guide track size :	
WR :	28
HR :	23
D :	11
h :	12
d :	9
P :	80
Standard end distance E :	20
Actual end distance :	20
Number of bolt holes n :	6
Guide rail fixed bolt :	M6x25
Rated dynamic load C :	23.70
Rated static load Co :	47.46
Rated static moment MR :	0.68
Rated static moment, MP :	0.55
Rated static moment, MY :	0.55
Slider weight :	1.04
Guide rail weight :	4.35