








**MGN-C / MGN-H**

MGN7, MGN9, MGN12



MGN15

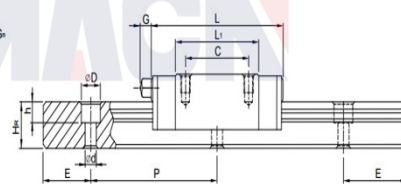

**Model: MGN9C**

**Param**

Guide rail model:	MGN9C
Slider special processing:	无
Number type of slider:	单个
Guide rail length L:	135
L computational formula:	$L=(n-1) \times P+2 \times E$ n=1,2,3....
Special processing of guide rail:	无
Pre-pressure grade:	普通间隙(ZF)
accuracy class:	普通(C)
Guide track material:	普通钢
dustproof equipped with grade:	标准防尘配备
Dust equipped with:	标准(刮油片)
Component size:	
H:	10
H1:	2
N:	5.5
Slider size:	
W:	20
B:	15
B1:	2.5
C:	10
L1:	18.9
L:	28.9
G:	-
Gn:	φ 1.4
MxL:	M3x3
H2:	1.8
Guide track size:	

WR:	9
HR:	6.5
D:	6
h:	3.5
d:	3.5
P:	20
Standard end distance E:	7.5
Actual end distance:	7.5
Number of bolt holes n:	7
Guide rail fixed bolt:	M3x8
Rated dynamic load C:	1.86
Rated static load Co:	2.55
Rated static moment MR:	11.76
Rated static moment, MP:	7.35
Rated static moment, MY:	7.35
Slider weight:	0.016
Guide rail weight:	0.38