








MGN-C / MGN-H

MGN7, MGN9, MGN12



MGN15

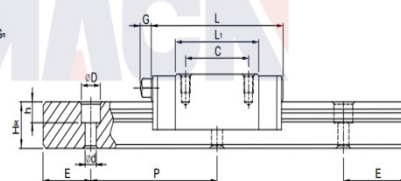

Model: MGN15C

Param

Guide rail model:	MGN15C
Slider special processing:	无
Number type of slider:	单个
Guide rail length L:	230
L computational formula:	$L=(n-1) \times P+2 \times E$ n=1,2,3....
Special processing of guide rail:	无
Pre-pressure grade:	普通间隙(ZF)
accuracy class:	普通(C)
Guide track material:	普通钢
dustproof equipped with grade:	标准防尘配备
Dust equipped with:	标准(刮油片)
RC reinforced bolt cover:	无
Component size:	
H:	16
H1:	4
N:	8.5
Slider size:	
W:	32
B:	25
B1:	3.5
C:	20
L1:	26.7
L:	42.1
G:	4.5
Gn:	M3
MxL:	M3x4

H2:	3
Guide track size:	
WR:	15
HR:	10
D:	6
h:	4.5
d:	3.5
P:	40
Standard end distance E:	15
Actual end distance:	15
Number of bolt holes n:	6
Guide rail fixed bolt:	M3x10
Rated dynamic load C:	4.61
Rated static load Co:	5.59
Rated static moment MR:	45.08
Rated static moment, MP:	21.56
Rated static moment, MY:	21.56
Slider weight:	0.059
Guide rail weight:	1.06